

TG-A20KX

High Performance Thermal Pad

REACH Compliant

RoHS Compliant

UL Compliant

Features

- Great thermal conductivity
- Difficult to be deformed
- Easy to assemble
- Double sided inherent tack


Application:

Best for low and medium power applications


Electronic components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

Properties



Thermal Conductivity: 2.0 W/m·K



Hardness: 55 (Shore OO)



Contact Pressure, Thermal Impedance, and Deflection

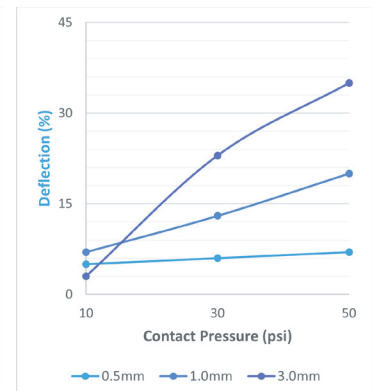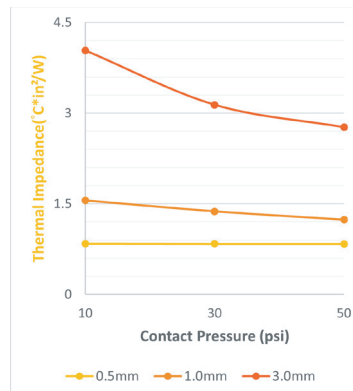

Properties	Unit	TG-A20KX	Tolerance	Test Method
Thermal Conductivity	W/m·K	2	± 10%	ASTM D5470 Modified
Thickness	mm	0.3~10.0	-	ASTM D374
	inch	0.012~0.394	-	ASTM D374
Color	-	Dark Gray	-	Colorimeter CIE 1976
Reinforcement Carrier	-	-	-	-
Flame Rating	-	V-0	-	UL 94
Dielectric Breakdown Voltage	KV/mm	≥12	-	ASTM D149
Weight Loss	%	<1	-	ASTM E595 Modified
Density	g/cm³	2	± 5%	ASTM D792
Operating Temperature	° C	-40~+180	-	-
Volume Resistivity	Ohm-m	3× 10 ¹²	-	ASTM D257
Elongation	%	160	-	ASTM D412
Standard Format	-	Sheet	-	-
Hardness	Shore OO	55	± 8	ASTM D2240

For thicknesses less than 1.0mm, hardness will be adjusted to 50-75 Shore OO to facilitate effective removal of liner during production
 Different tolerances according to the selected thickness
 Die-cut for different shapes

Produkt anfragen