

BB02-YC - 1.00mm x 1.00mm (0.039" x 0.039") PIN HEADER, DUAL ROW, STRAIGHT, THROUGH HOLE, 04 TO 80 CONTACTS

SPECIFICATIONS





CURRENT RATING: 0.5 AMP
 INSULATOR RESISTANCE: 500 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING: AC 200 V
 CONTACT RESISTANCE: 20m OHMS MAX.
 OPERATING TEMPERATURE: -40°C TO +105°C
 CONTACT MATERIAL: BRASS
 INSULATOR MATERIAL: POLYESTER UL 94V-0

STANDARD:LCP

PLATING GOLD OR TIN OVER 30-50U" NICKEL
 SOLDERABILITY IR REFLOW: 280°C FOR 10 SEC
 WAVE: 250°C FOR 5-10 SEC
 MANUAL SOLDER: 380°C FOR 3-5 SEC


PACKED LOOSE IN BOX.

MATES WITH: - BB02-WA

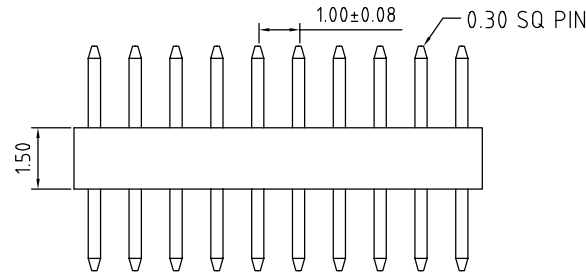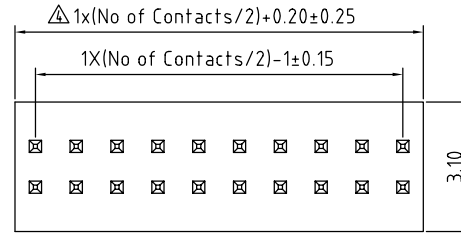

RECOMMENDED PC BOARD LAYOUT

HOW TO ORDER

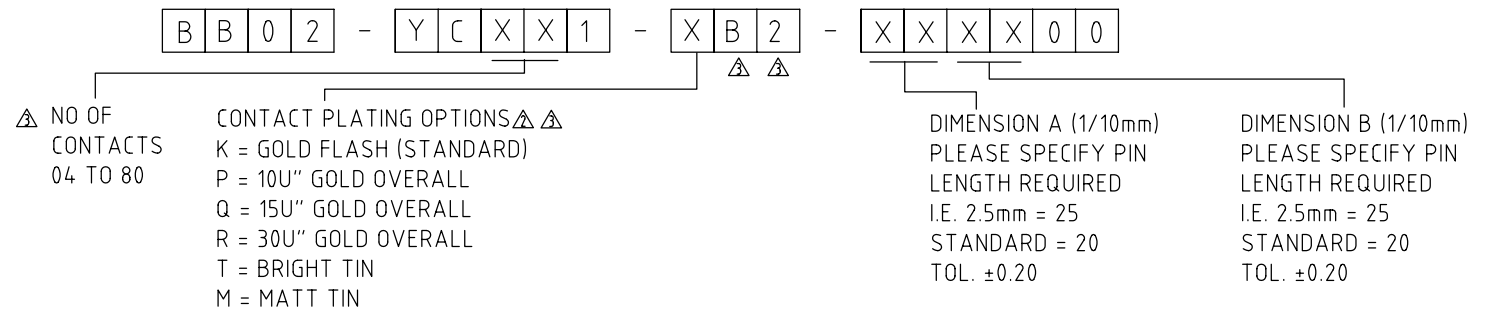

REV. DATE & DRN	10. 23/02/04 - NIR RELEASE
	11. 29/07/04 - NYW
	12. 03/02/05 - NYW
	13. 03/02/05 - NYW
	14. 15/06/05 - NYW
	15. 08/08/06 - CHC
	16. 06/06/08 - CHC
	17. 23/07/08 - NYW
	18. 05/08/08 - NYW
	19. 05/08/08 - NYW

Scale	8=1
Drawn	CHC
App'd	XXX
Date	24 DEC '08

THIRD ANGLE	
Title	PIN HEADER
Revision:	1.8

Material	SEE NOTE
Unit:	mm

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN C^o

ype	BB02-YC
Drawing Number	BB02-YC
Sheet	1 of 1
Drawing	E and O E