



TG-AL373 / L37-3

Thermal Pad

REACH Compliant

RoHS Compliant

UL Compliant

Features


- Base materials are silicone with fiberglass
- One side with natural tack and the other with smooth
- Surface won't be deformed when being pulled
- High voltage resistance

Application:

Electronic Components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

Properties


Contact Pressure, Thermal Impedance, and Deflection

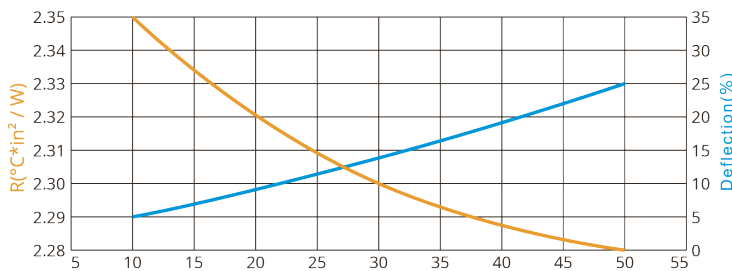

Contact Pressure (psi)	Thermal Impedance (°C*in ² /W)	Deflection (%)
10	2.35	5
30	2.30	14
50	2.28	25

Thermal Conductivity : 1.8 W/mK

Hardness : 45 (Shore OO)



Properties	Unit	TG-AL373 / L37-3	Tolerance	Test Method
Thermal Conductivity	W/m·K	1.8	± 10%	ASTM D5470 Modified
Thickness	mm	0.3~20.0	-	ASTM D374
	inch	0.0118~0.787	-	ASTM D374
Color	-	Yellow	-	Colorimeter CIE 1976
Reinforcement Carrier	-	Fiberglass Mesh	-	-
Flame Rating	-	V-0	-	UL 94
Dielectric Breakdown Voltage	KV/mm	≥10.2	-	ASTM D149
Weight Loss	%	<1	-	ASTM E595 Modified
Density	g/cm ³	2.17	± 5%	ASTM D792
Operating Temperature	° C	-40~+200	-	-
Volume Resistivity	Ohm-m	>10 ¹¹	-	ASTM D257
Tensile strength	kgf/cm ²	66.4	-	ASTM D412
Standard Format	-	Sheet	-	-
Hardness	Shore OO	45	± 10	ASTM D2240

For thicknesses less than 1.0mm, hardness will be adjusted to 50-75 Shore OO to facilitate effective removal of liner during production
 Different tolerances according to the selected thickness
 Die-cut for different shapes

Produkt anfragen